


## DOUBLE BASKETBALL ANTIVANDALIC GROUND FIXING OVERHANG V-1 m. Ref. EB032



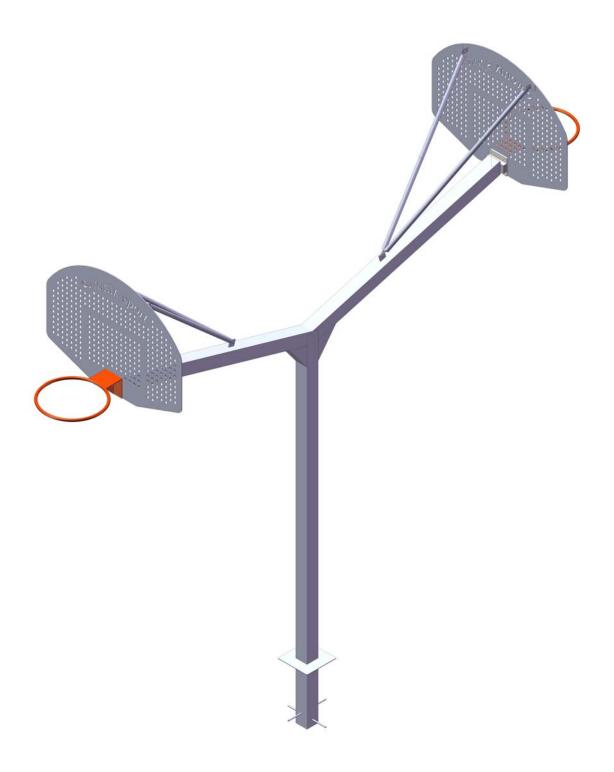

Company reserves the right to modify the information in accordance with current regulations

E-mail: <a href="mailto:euronix@euronix.es">euronix@euronix.es</a> Web: <a href="mailto:www.euronix.es">www.euronix.es</a>

### DOUBLE BASKETBALL ANTIVANDALIC GROUND FIXING OVERHANG V-1 m. Ref. EB032



## Descripción:


The EUROSCHOOL DOUBLE BASKET is manufactured according to regulations and is designed to be installed between contiguous basketball courts without the need to install two independent baskets, and can be placed on any type of external surface.

#### **Structure:**


It is composed of three square profiles of 100x100x3 angled welded, and joined with bevels 100x100x3, which ensures the structure stability

The basketball is embedded a depth of 50 cm. below the ground with a concrete pad. A laser cut plate is welded to the structure to achieve the correct positioning of the basketball.

The structure is galvanized to withstand adverse weather conditions.



EURONIX METAL, S.L.



Company reserves the right to modify the information in accordance with current regulations

E-mail: <a href="mailto:euronix.es">euronix.@euronix.es</a> Web: <a href="mailto:www.euronix.es">www.euronix.es</a>



# DOUBLE BASKETBALL ANTIVANDALIC GROUND FIXING OVERHANG V-1 m. Ref. EB032



## Frame stabilizer system

Basket frames are completely stabilized by two stiffeners (each one) made up of two telescopic tubes that connect the profile of the structure with the frame, being adjusted to guarantee 100% straightness of the board, obtaining the desired perpendicularity of play with respect to the ground.

#### **Basket Frames**

Basket frames meet the dimensions of 1200mm.x 900mm, according to regulations. They are connected to the basket arms by means of a bolted connection.

Two angles are welded on the back of the frame to allow the stiffeners to be screwed together.

In addition, the basket frames are fitted with fully standardized net rings.

#### **Materials:**

Profiles, plates and ring are made of steel S235 JR and S275 JR.

Zinc plated screws (Zn) Quality 8.8

#### **Dimensions:**

DIMENSIONS (m.)	WEIGHT (Kg.)
1 bulk of 3,54x0,26 x2,09	162
1 bulto of 0,2x1,8x1,05	


Company reserves the right to modify the information in accordance with current regulations

**EURONIX METAL, S.L.** 



## DOUBLE BASKETBALL ANTIVANDALIC GROUND FIXING OVERHANG V-1 m. Ref. EB032



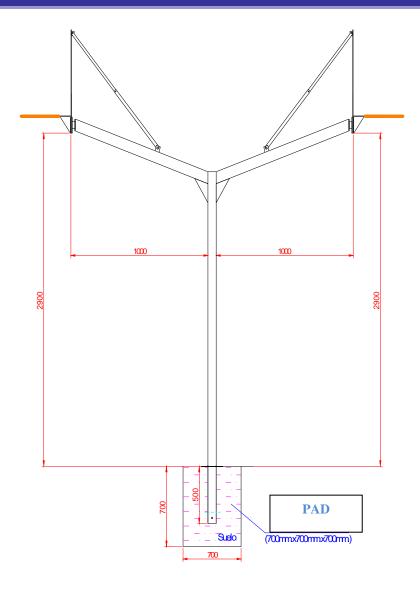

Company reserves the right to modify the information in accordance with current regulations

**EURONIX METAL, S.L.** 

E-mail: <a href="mailto:euronix.es"><u>euronix.@euronix.es</u></a> Web: <a href="mailto:www.euronix.es"><u>www.euronix.es</u></a>